

DURABLE
SINCE 1920

Floor marking tape DURALINE® STRONG 50/12

Article number	172504	**Sales unit quantity**	1 Piece
Colour	Yellow	**Sales unit EAN**	4005546982489
Packaging unit	piece	**Packing weight (gross)**	2025.6 G
Base EAN	4005546982489	**Country of origin**	GB

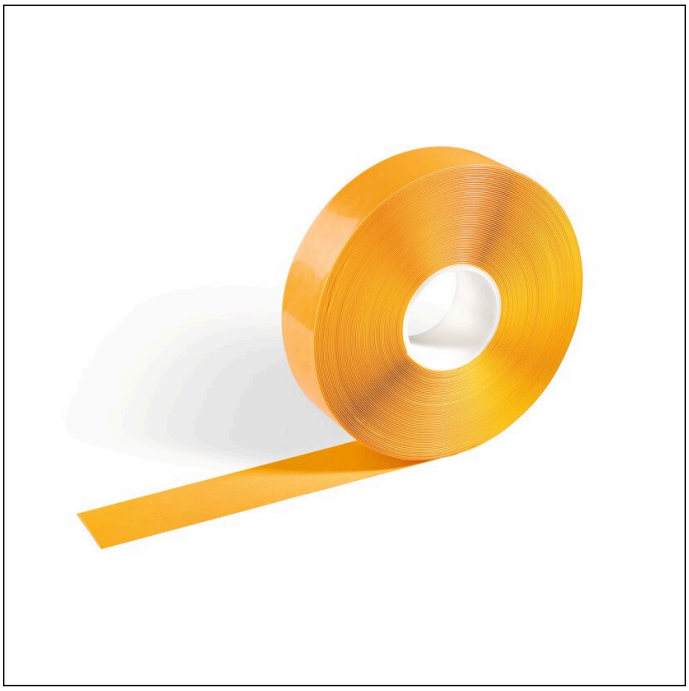

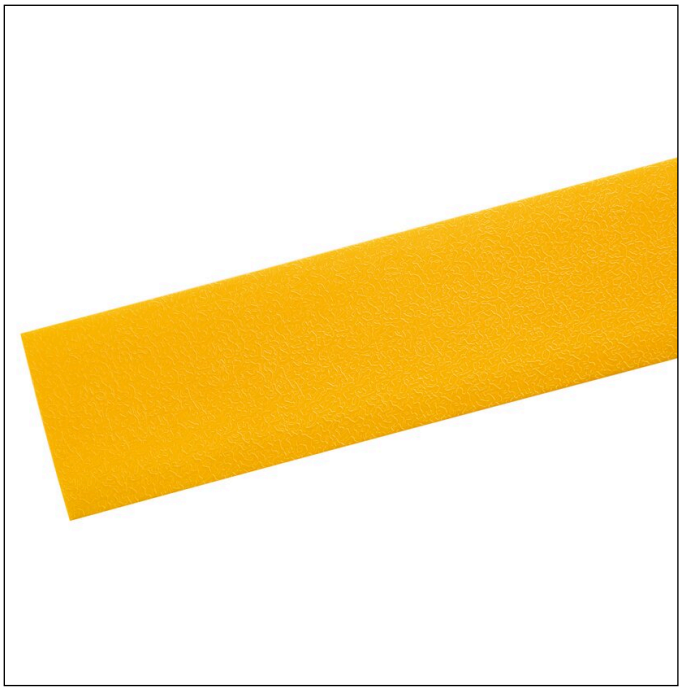

Logos and awards



Product description

- Extra-strong self-adhesive floor marking tape for the permanent marking of traffic routes, work areas and storage areas
- For floor markings, route marking and safety markings in logistics, production, warehousing and operational areas
- Extruded material with a tape thickness of 1.2 mm for high durability and a long service life
- Bevelled edges ensure strong Adhesive strength and reduce the risk of the material coming away under heavy use
- Suitable for forklifts, with the exception of steering, braking and turning movements
- Width 50 mm, tape thickness 1.2 mm: suitable for indoor footpaths and walkways
- Slip resistance (R Group) R10 in accordance with German workplace ordinance ASR A1.5/1,2 'Floors' per DIN 51130

DURABLE Hunke & Jochheim GmbH & Co. KG
Westfalenstraße 77 – 79 · 58636 Iserlohn · Germany
Phone +49 (0) 2371 662 0 · **Fax** +49 (0) 2371 662 221
Mail durable@durable.de | durable.de

The statements contained herein are for informational purposes only and are true and accurate to the best of our scientific and technical knowledge. This information does not constitute a guarantee or warranty, express or implied, nor does it establish a legally valid contractual relationship. It is the customer's responsibility to determine the suitability of this product for the customer's intended use. DURABLE does not assume any liability for the customer's use of this product or the information contained herein.

TÜVRheinland CERTIFIED
Management System
ISO 14001:2015
ISO 9001:2015
www.tuv.com
ID 0091005181

Floor marking tape DURALINE® STRONG 50/12

Product features

Outer width (mm)	50
Outer depth / length	30 m
Brand	DURABLE
Self-adhesive type	Permanent
Adhesive strength	Strong
Abrasion resistance	High
Material thickness	1.2 mm
Special colour	Similar to RAL 1003 signal yellow
Application area	Walking area, driving area, suitable for forklift trucks
Diameter of roll holder (mm)	76
Technical standard	ASR A1.5/1.2 ''Floors'' according to DIN 51130 Slip resistance (R-group) R10

DURABLE Hunke & Jochheim GmbH & Co. KG
Westfalenstraße 77 – 79 · 58636 Iserlohn · Germany
Phone +49 (0) 2371 662 0 · **Fax** +49 (0) 2371 662 221
Mail durable@durable.de | durable.de

The statements contained herein are for informational purposes only and are true and accurate to the best of our scientific and technical knowledge. This information does not constitute a guarantee or warranty, express or implied, nor does it establish a legally valid contractual relationship. It is the customer's responsibility to determine the suitability of this product for the customer's intended use. DURABLE does not assume any liability for the customer's use of this product or the information contained herein.

TÜVRheinland CERTIFIED
Management System
ISO 14001:2015
ISO 9001:2015
www.tuv.com
ID 0091005181