
Prohibition sticker "Entry prohibited" Ø 430 mm

Article number	173003	**Sales unit quantity**	1 Piece
Colour	Red	**Sales unit EAN**	4005546983417
Packaging unit	piece	**Packing weight (gross)**	113.2 G
Base EAN	4005546983417	**Country of origin**	GB



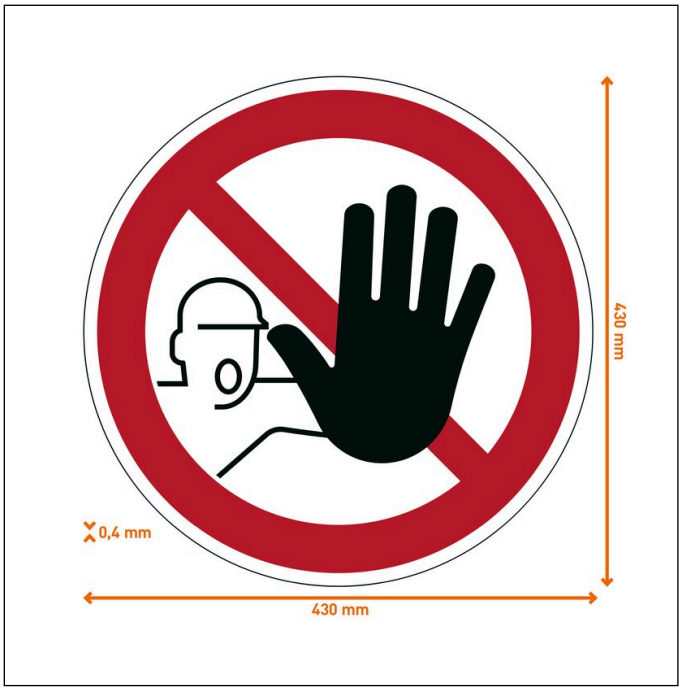

Product description

- 'No Entry' floor sticker (D-P006) for prohibition and safety signage indoors
- For floor markings, access control and prohibition signage in warehouses, logistics, production and operational areas
- Self-adhesive version for application to smooth, surfaces with high load capacity that are free from grease and dust
- An abrasion-resistant and hard-wearing design for high-traffic areas
- Diameter 430 mm, material thickness 0.2 mm
- Compliant with ASR A1.3 and DIN 4844-2
- Ideal for marking inaccessible areas, safety zones and operational areas

Product features

Outer height (mm)	1
Outer Ø (mm)	430
Brand	DURABLE
Shape	Round
Safety symbol type	Command sign
Symbol / Icon	No entry

DURABLE Hunke & Jochheim GmbH & Co. KG
Westfalenstraße 77 – 79 · 58636 Iserlohn · Germany
Phone +49 (0) 2371 662 0 · **Fax** +49 (0) 2371 662 221
Mail durable@durable.de | durable.de

The statements contained herein are for informational purposes only and are true and accurate to the best of our scientific and technical knowledge. This information does not constitute a guarantee or warranty, express or implied, nor does it establish a legally valid contractual relationship. It is the customer's responsibility to determine the suitability of this product for the customer's intended use. DURABLE does not assume any liability for the customer's use of this product or the information contained herein.

TÜVRheinland CERTIFIED
Management System
ISO 14001:2015
ISO 9001:2015
www.tuv.com ID 0091005181

Prohibition sticker "Entry prohibited" Ø 430 mm

Technical standard symbol reference	D-P006 according to DIN 4844-2
Mark language	Neutral
Self-adhesive type	Permanent
Adhesive strength	Normal
Abrasion resistance	Normal
Material thickness	0.4 mm
Special colour	Similar to RAL 3001 signal red
Colour	Red / white / black
Application area	Walking area, driving area
Technical standard	ASR A1.3, DIN 4844-2, ASR A1.5/1,2 ''Floors'' according to DIN 51130 Slip resistance (R-group) R9

DURABLE Hunke & Jochheim GmbH & Co. KG
Westfalenstraße 77 – 79 · 58636 Iserlohn · Germany
Phone +49 (0) 2371 662 0 · **Fax** +49 (0) 2371 662 221
Mail durable@durable.de | durable.de

The statements contained herein are for informational purposes only and are true and accurate to the best of our scientific and technical knowledge. This information does not constitute a guarantee or warranty, express or implied, nor does it establish a legally valid contractual relationship. It is the customer's responsibility to determine the suitability of this product for the customer's intended use. DURABLE does not assume any liability for the customer's use of this product or the information contained herein.

TÜVRheinland CERTIFIED
Management System
ISO 14001:2015
ISO 9001:2015
www.tuv.com
ID 0091005181